



US005608421A

United States Patent [19]

Okada

[11] Patent Number: **5,608,421**[45] Date of Patent: ***Mar. 4, 1997****[54] DRIVE CIRCUIT FOR A DISPLAY APPARATUS**[75] Inventor: **Hisao Okada**, Ikoma-gun, Japan[73] Assignee: **Sharp Kabushiki Kaisha**, Osaka, Japan

[*] Notice: The term of this patent shall not extend beyond the expiration date of Pat. No. 5,440,323.

[21] Appl. No.: **379,350**[22] Filed: **Jan. 27, 1995****Related U.S. Application Data**

[63] Continuation of Ser. No. 767,340, Sep. 27, 1991, Pat. No. 5,440,323.

[30] Foreign Application Priority Data

Sep. 28, 1990 [JP] Japan 2-261472

[51] Int. Cl.⁶ **G09G 3/36**[52] U.S. Cl. **345/100; 345/98**[58] Field of Search **345/88, 90, 94-96, 345/99, 100, 103, 76, 80****[56] References Cited****U.S. PATENT DOCUMENTS**

4,799,057 1/1989 Takeda et al. .


4,870,399 9/1989 Carlson .
 5,017,914 5/1991 Uchida et al. .
 5,061,920 10/1991 Nelson .
 5,070,255 12/1991 Shin .
 5,101,116 3/1992 Morokawa .
 5,111,195 5/1992 Fukuoka et al. .

FOREIGN PATENT DOCUMENTS

2507366 12/1982 France .
 2102176 1/1983 United Kingdom .
 2162984 2/1986 United Kingdom .

Primary Examiner—Jeffery Brier*Attorney, Agent, or Firm*—David G. Conlin; George W. Neuner**[57]****ABSTRACT**

A drive circuit for a display apparatus having parallel signal electrodes has at least one voltage selecting circuit, a plurality of signal voltage circuits, and one selection signal circuit. The voltage selecting circuit selects one of voltages having different levels in accordance with an input digital video signal. The signal voltage circuits are respectively provided for the signal electrodes, and include one signal line which is disposed between the voltage circuit and the respective signal electrode. The signal line is provided with an input switch, a capacitor and an output switch. The selection signal circuit generates a signal for controlling the input switches of the signal voltage circuits to be sequentially closed.

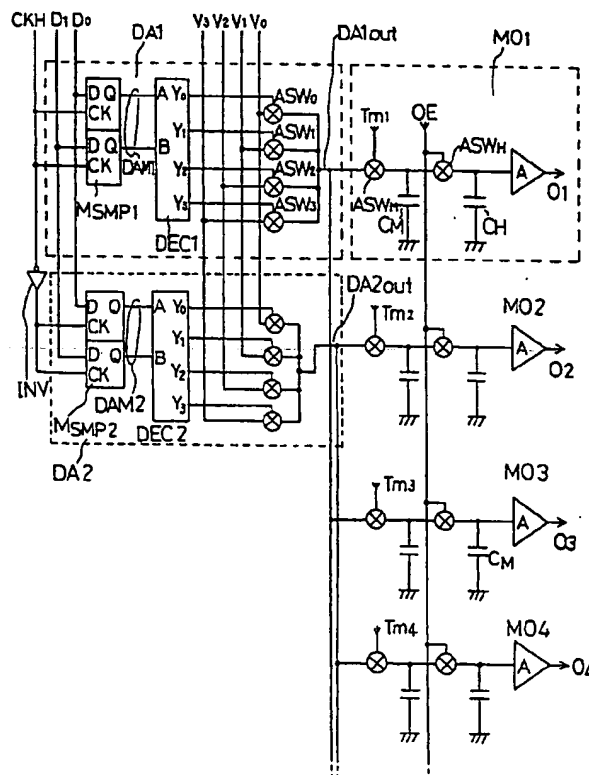2 Claims, 16 Drawing Sheets

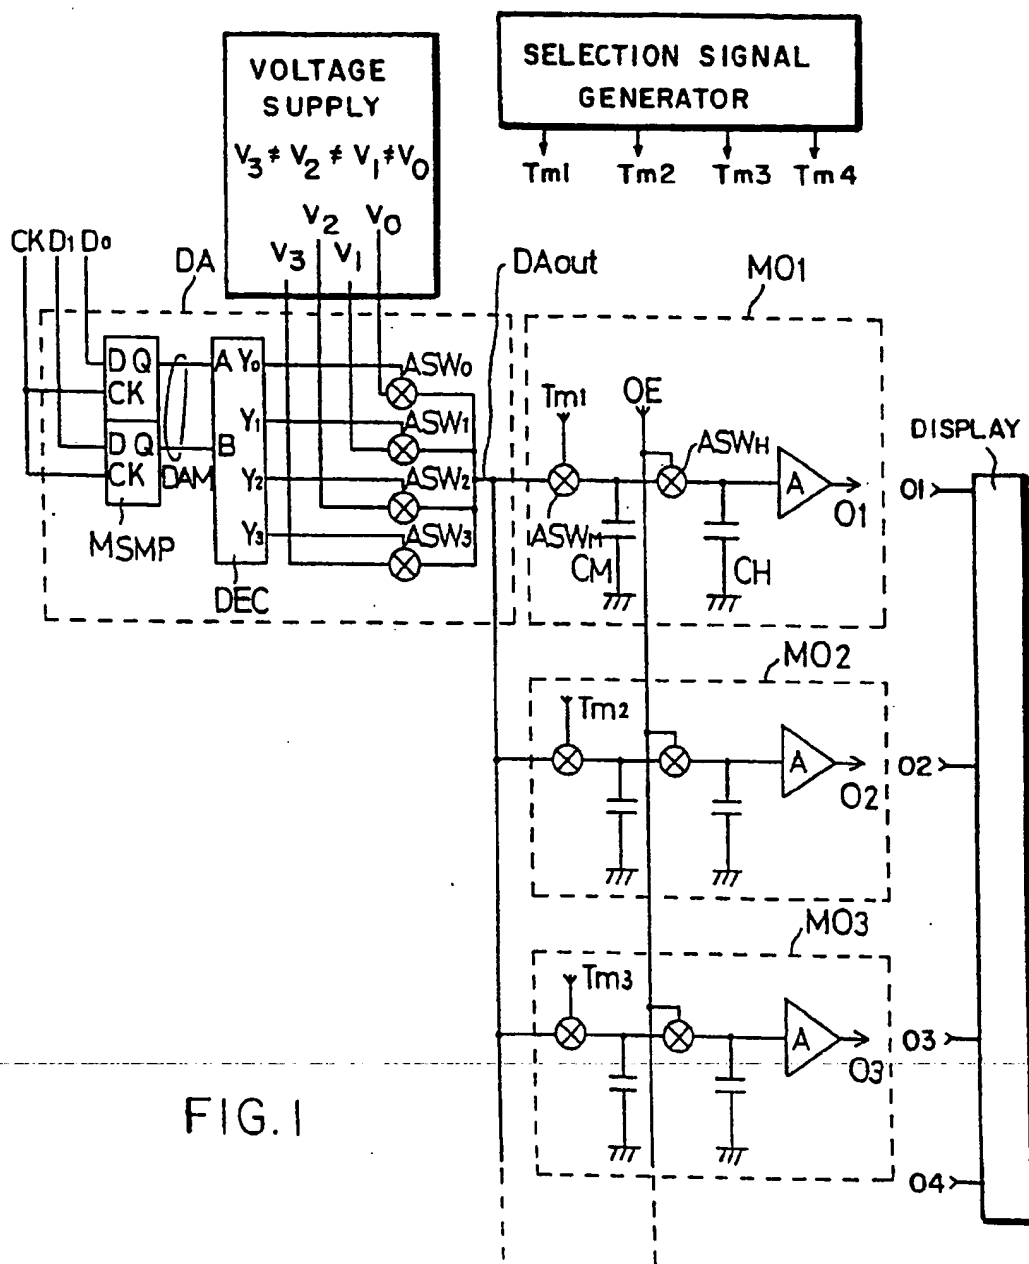


FIG. 1

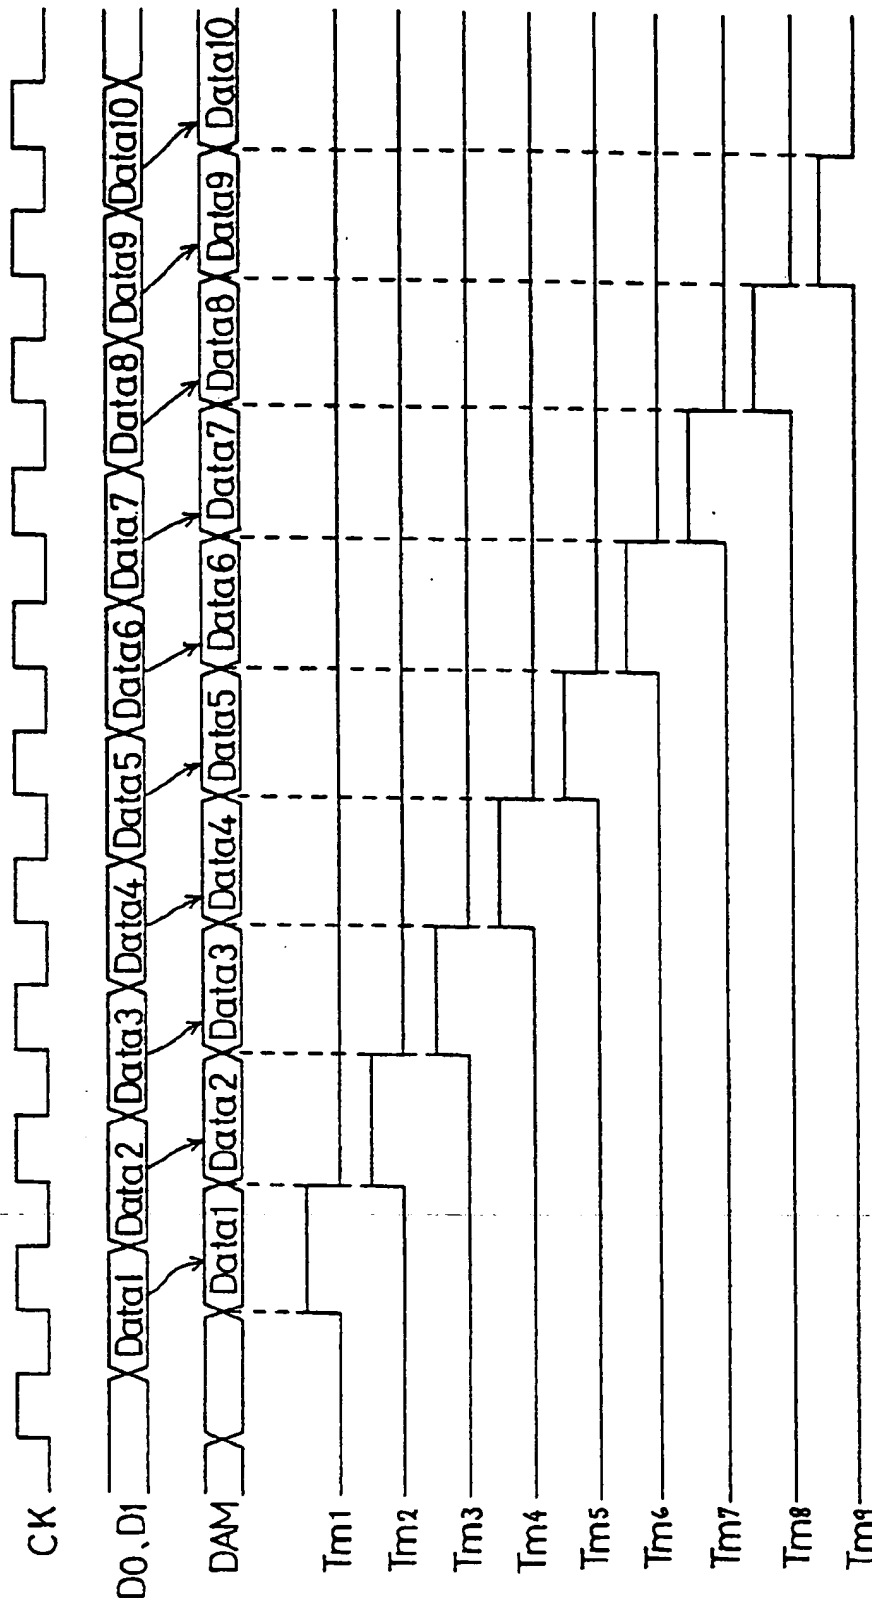


FIG. 2

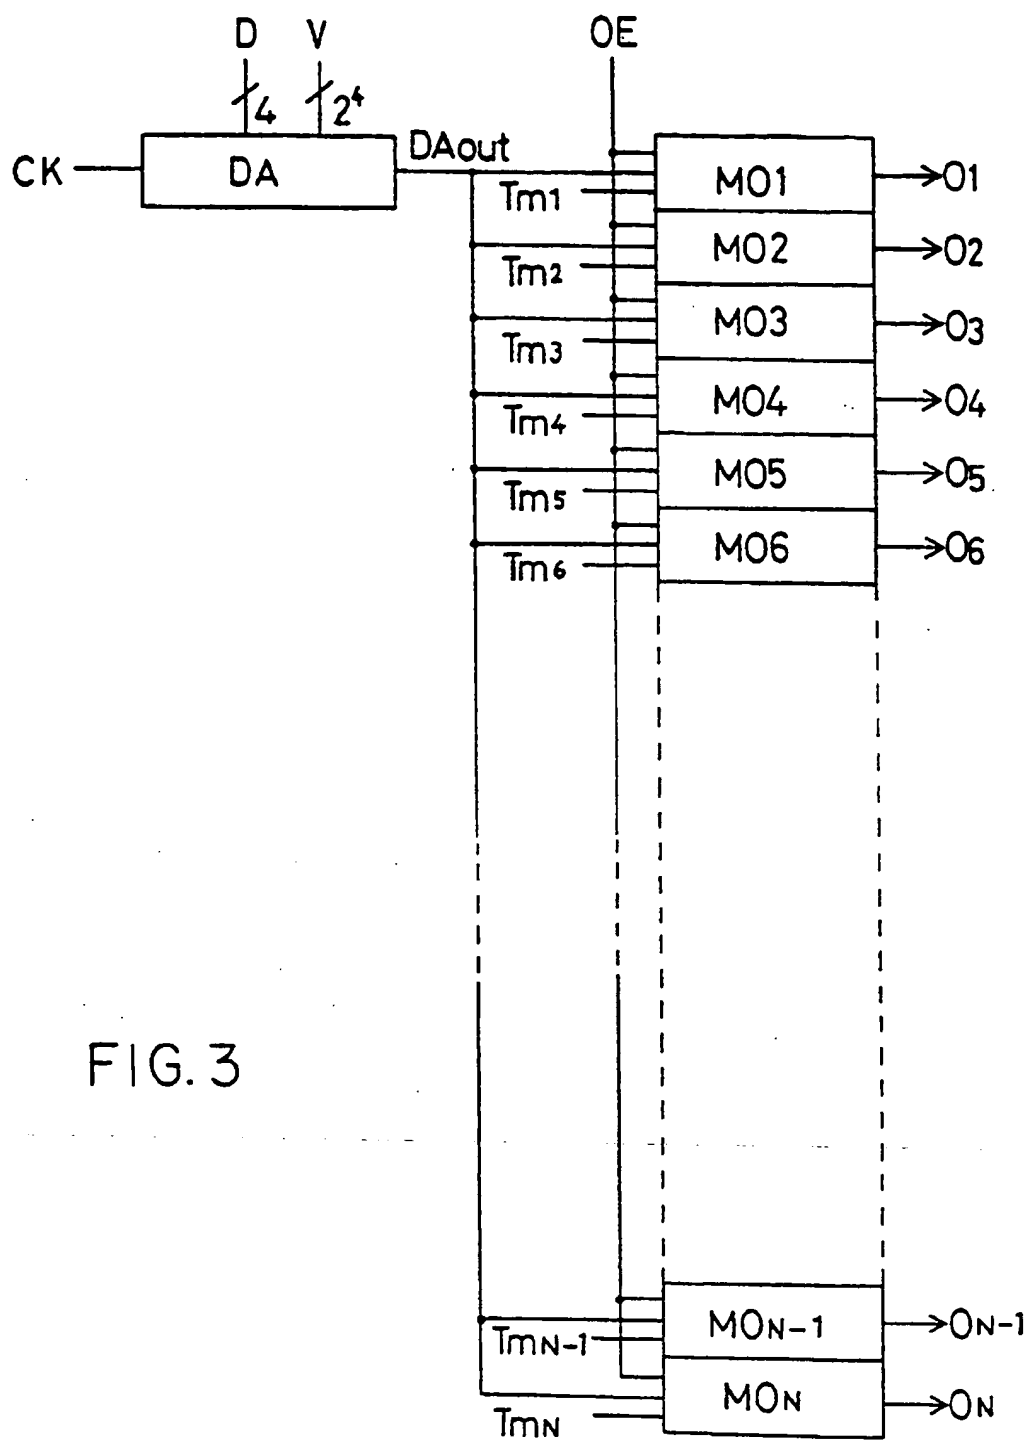


FIG. 3

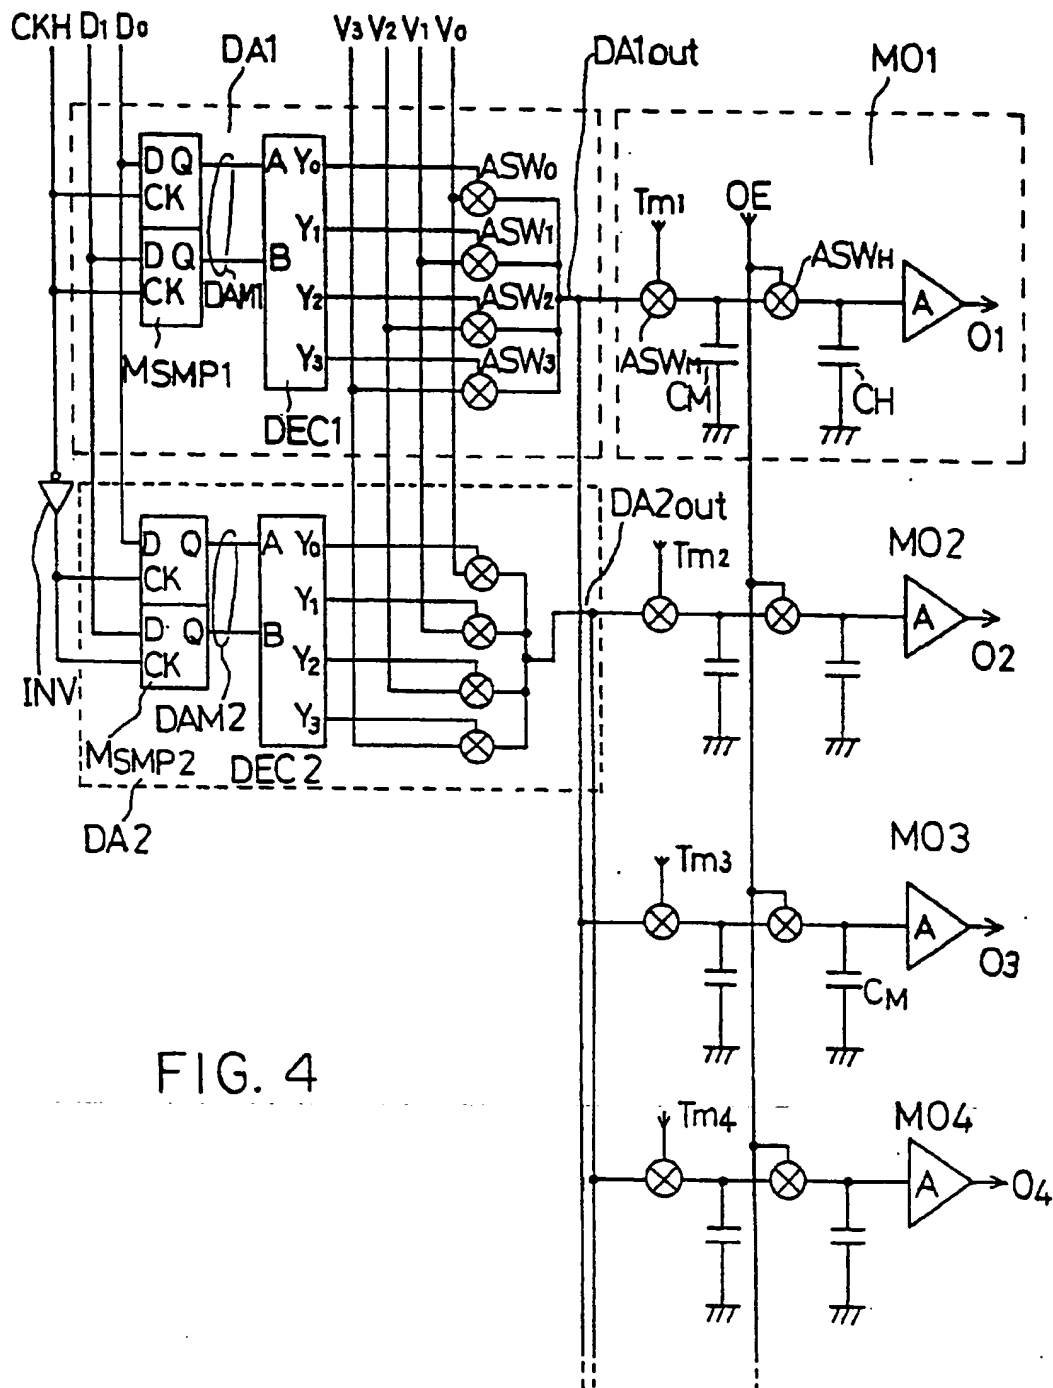


FIG. 4

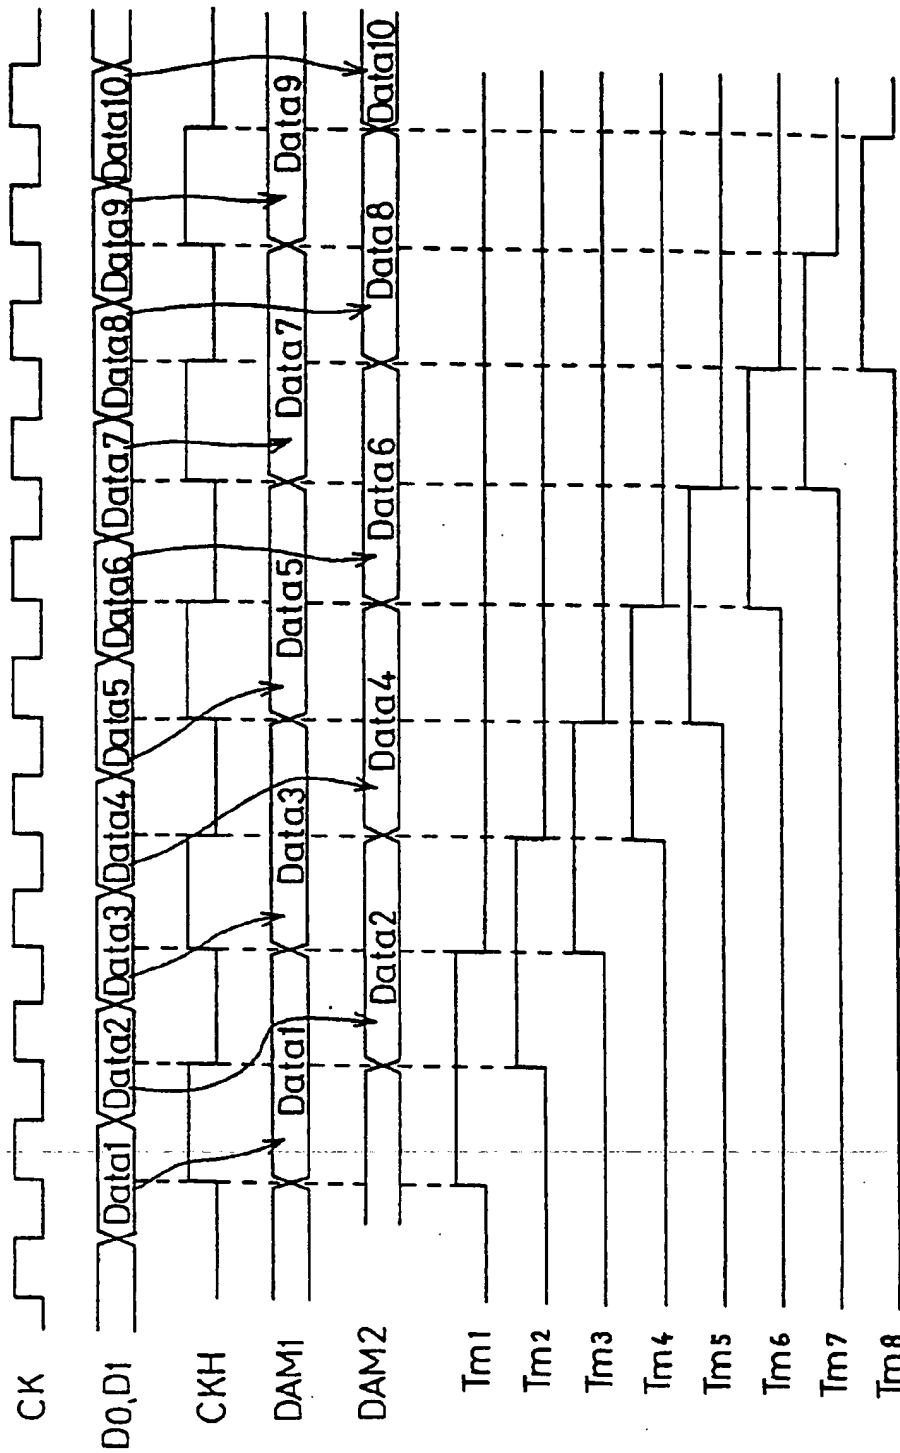


FIG. 5

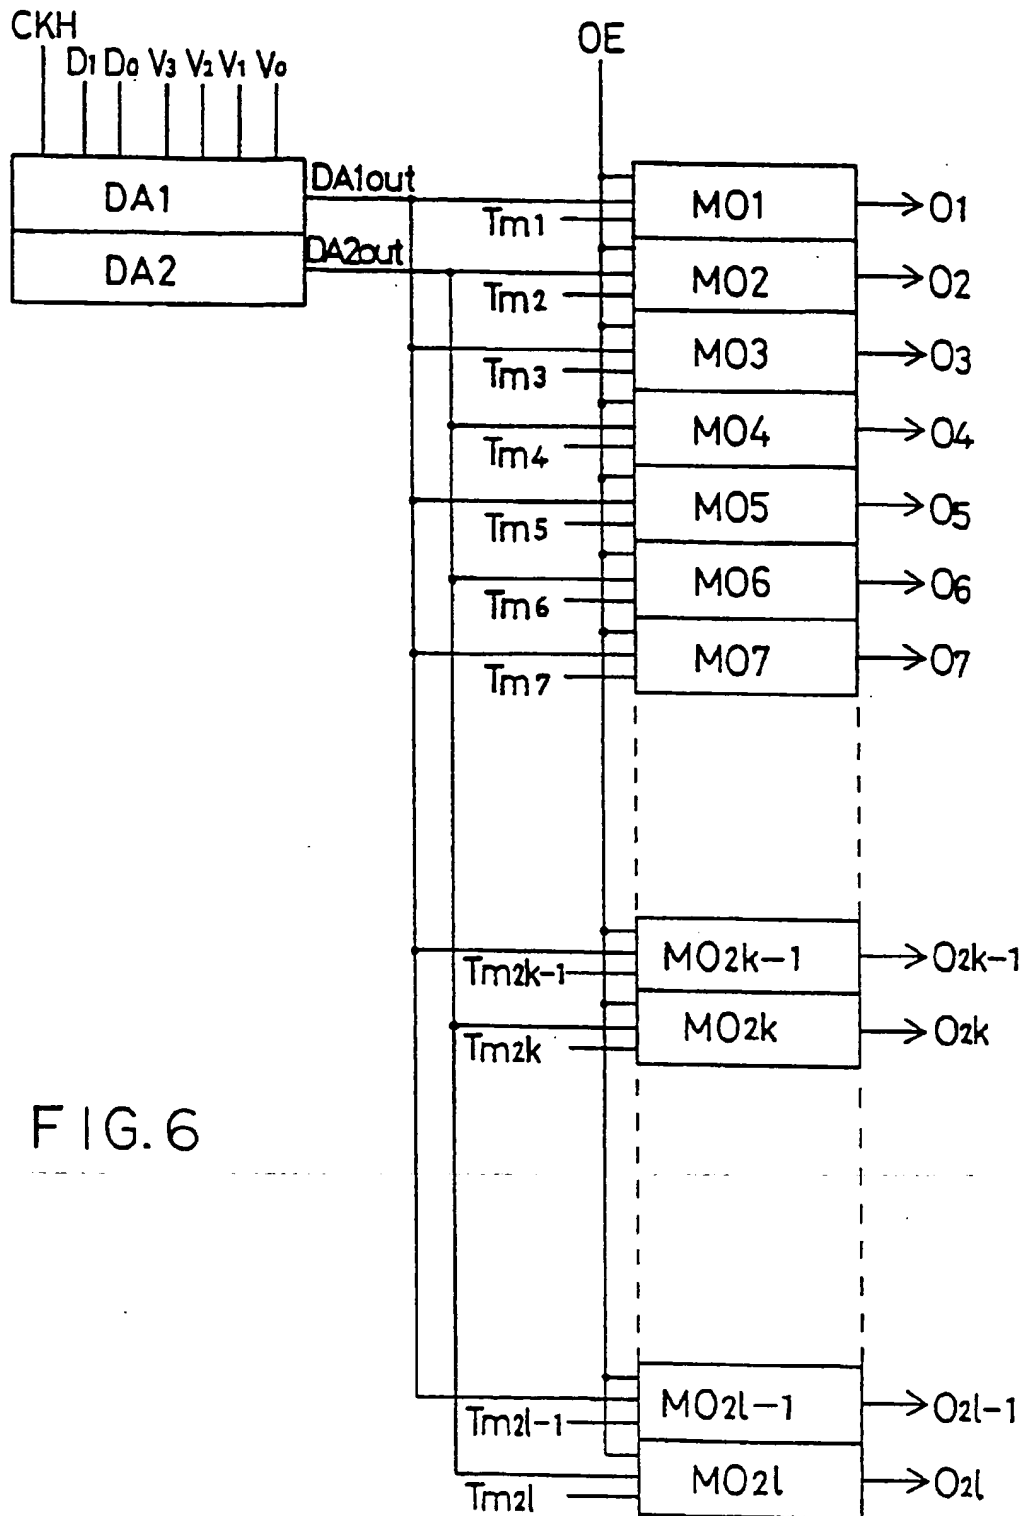


FIG. 6

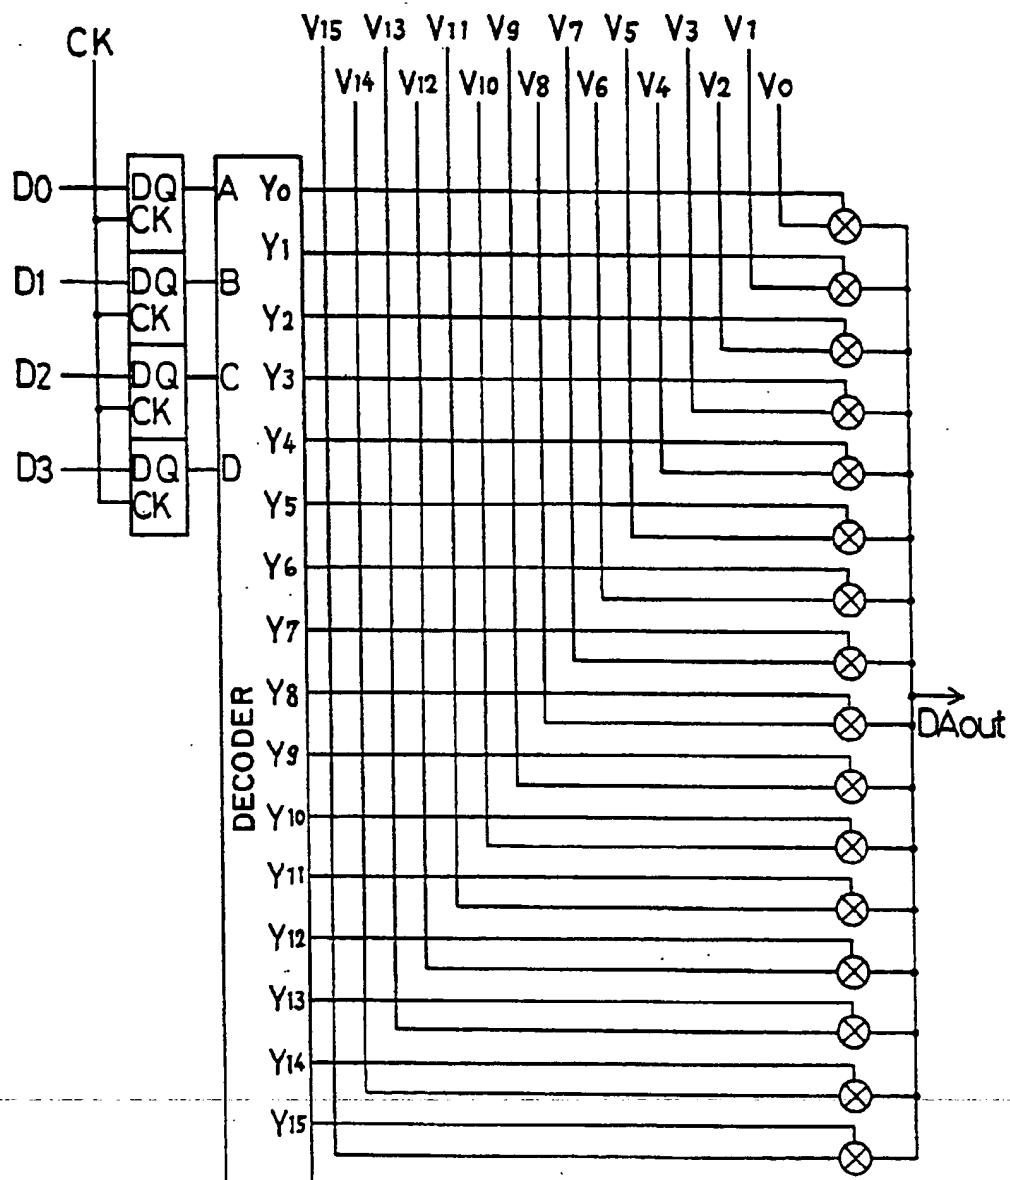
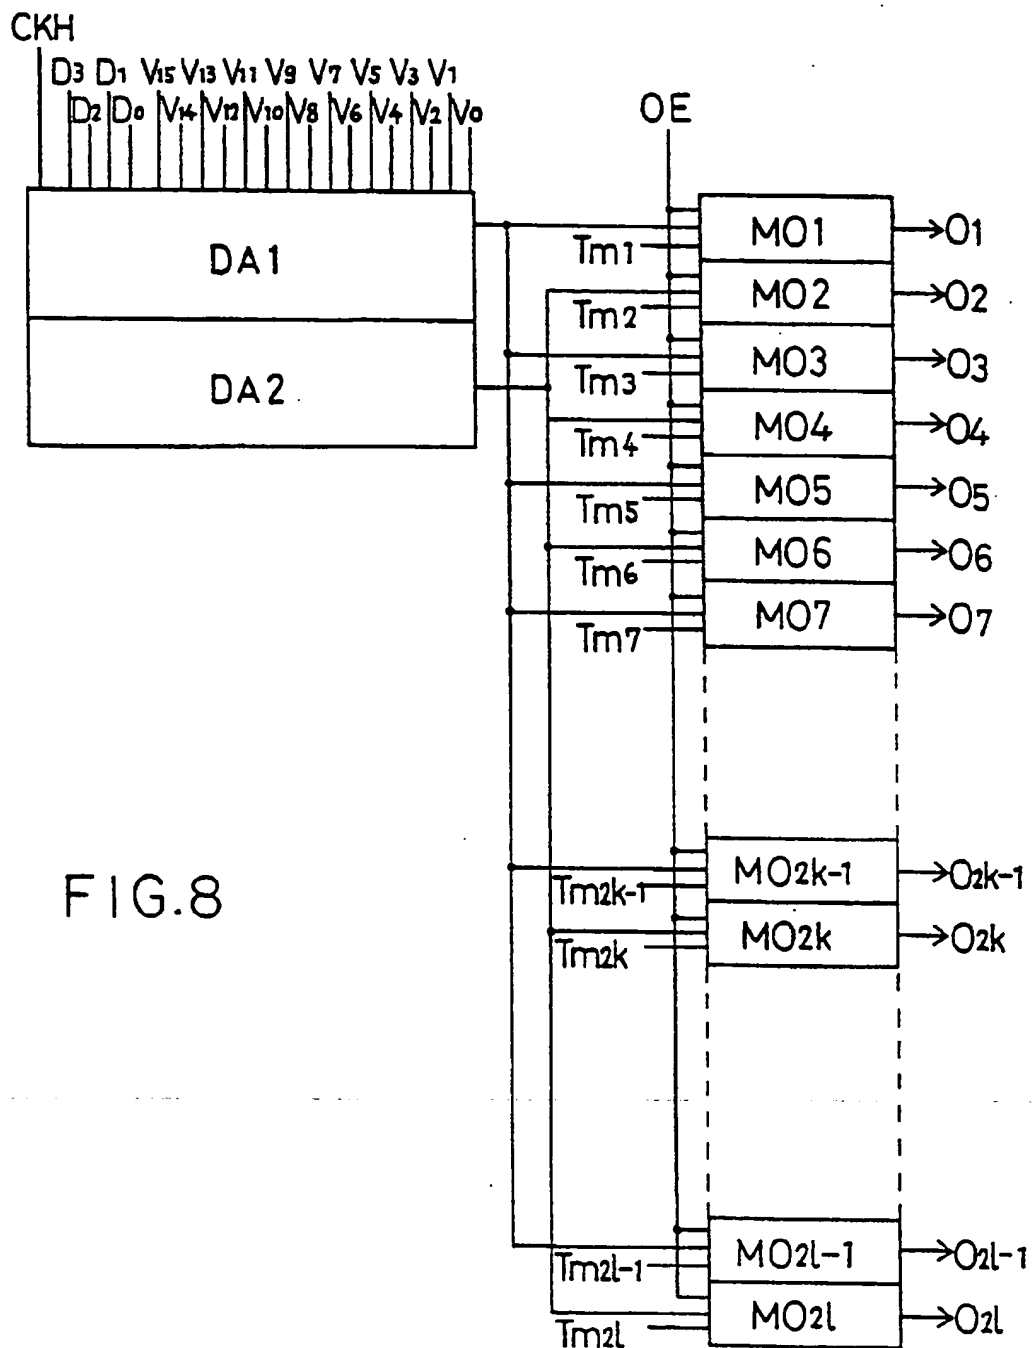
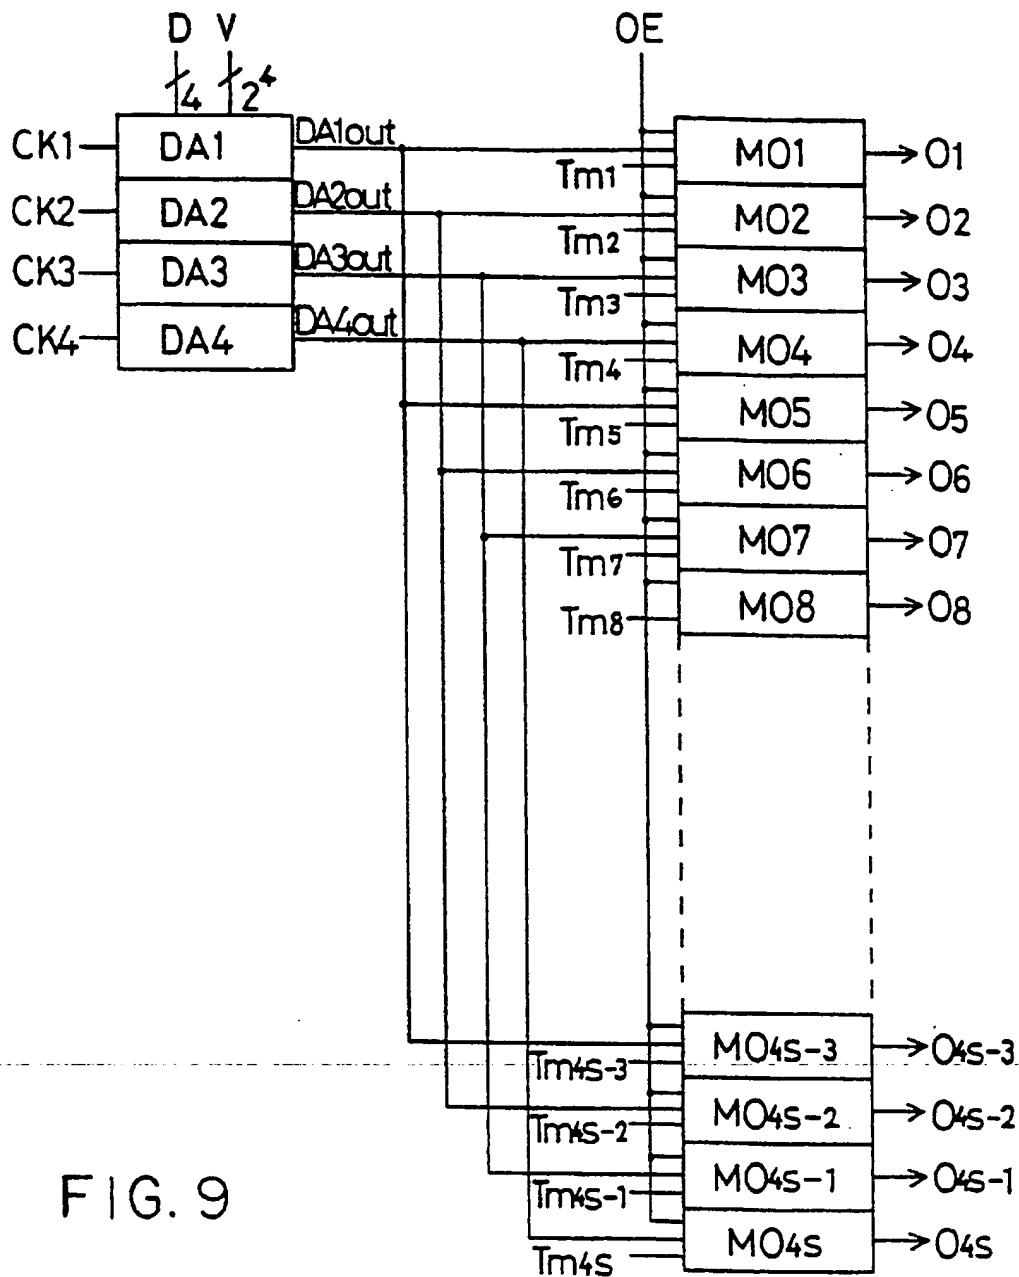


FIG. 7





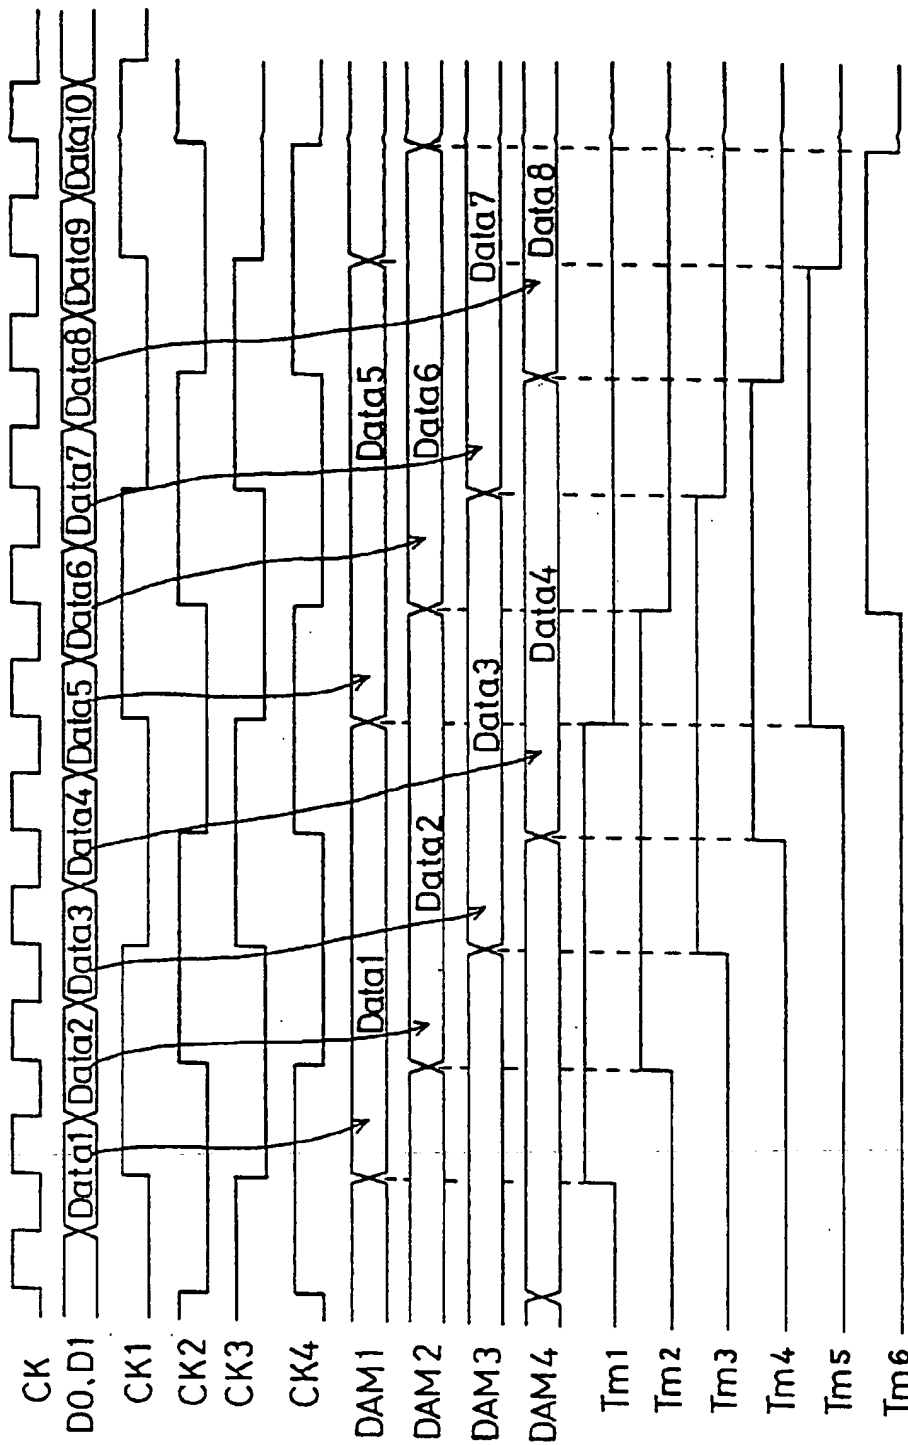


FIG. 10

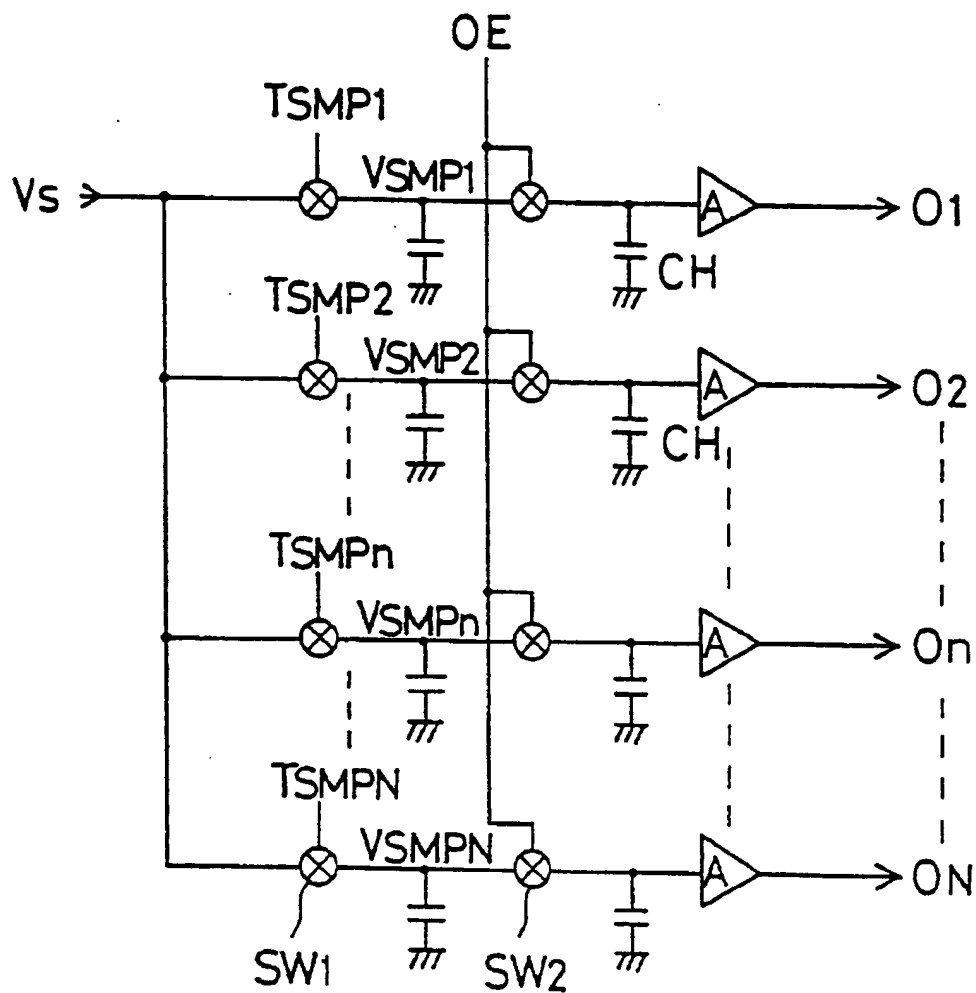


FIG. II PRIOR ART

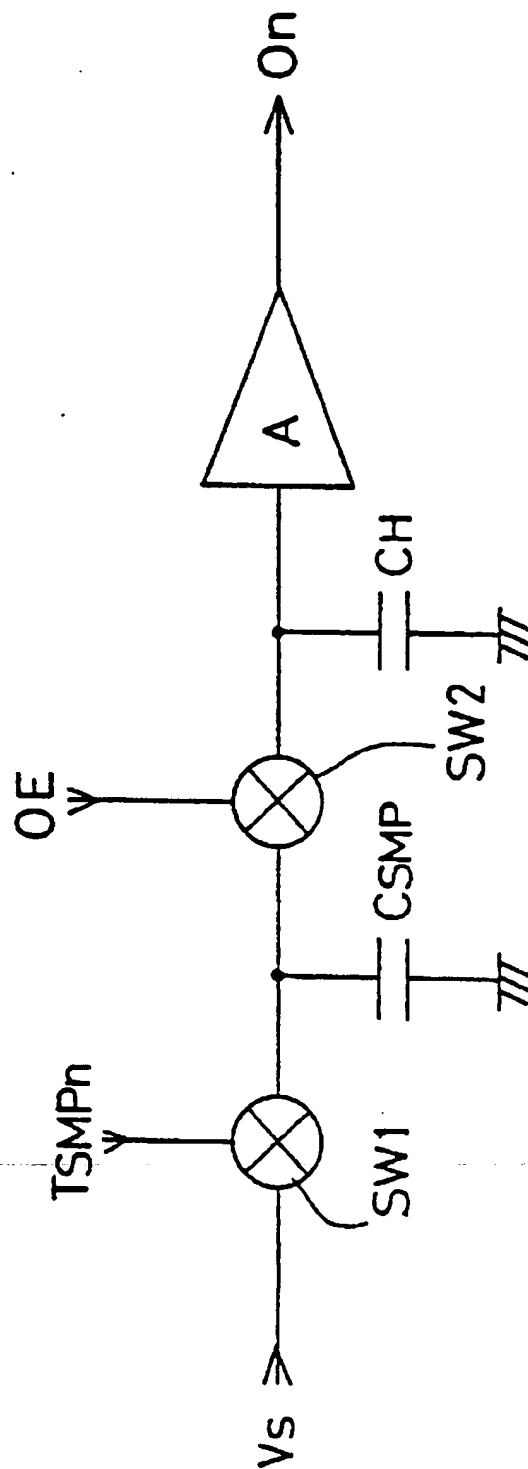
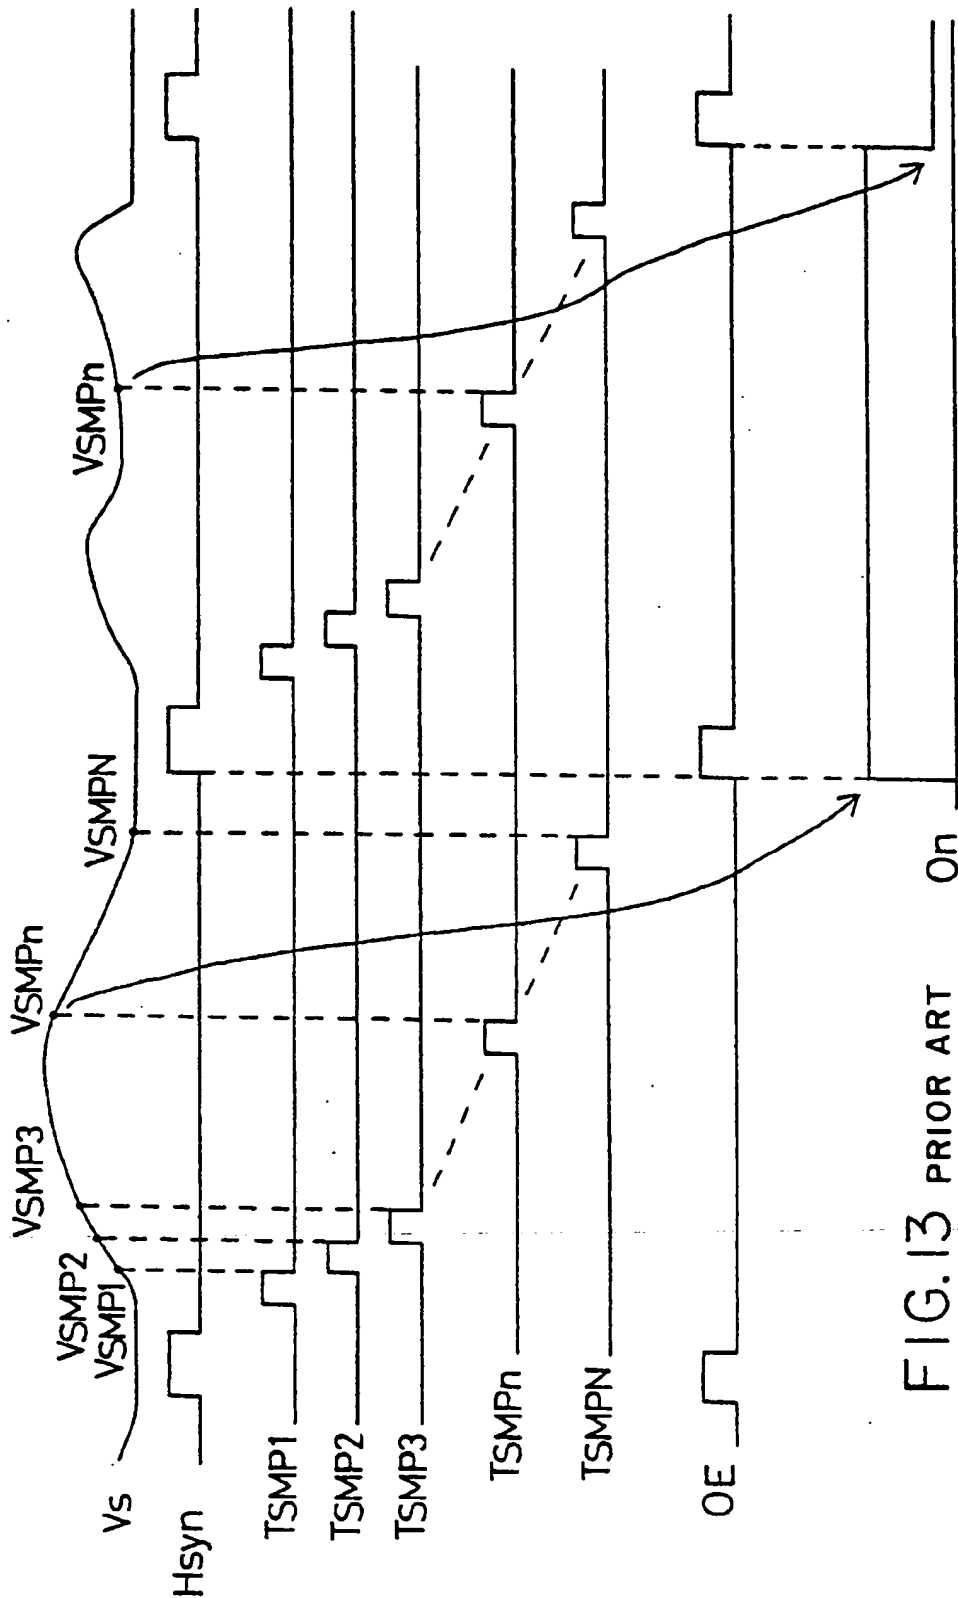


FIG. 12 PRIOR ART



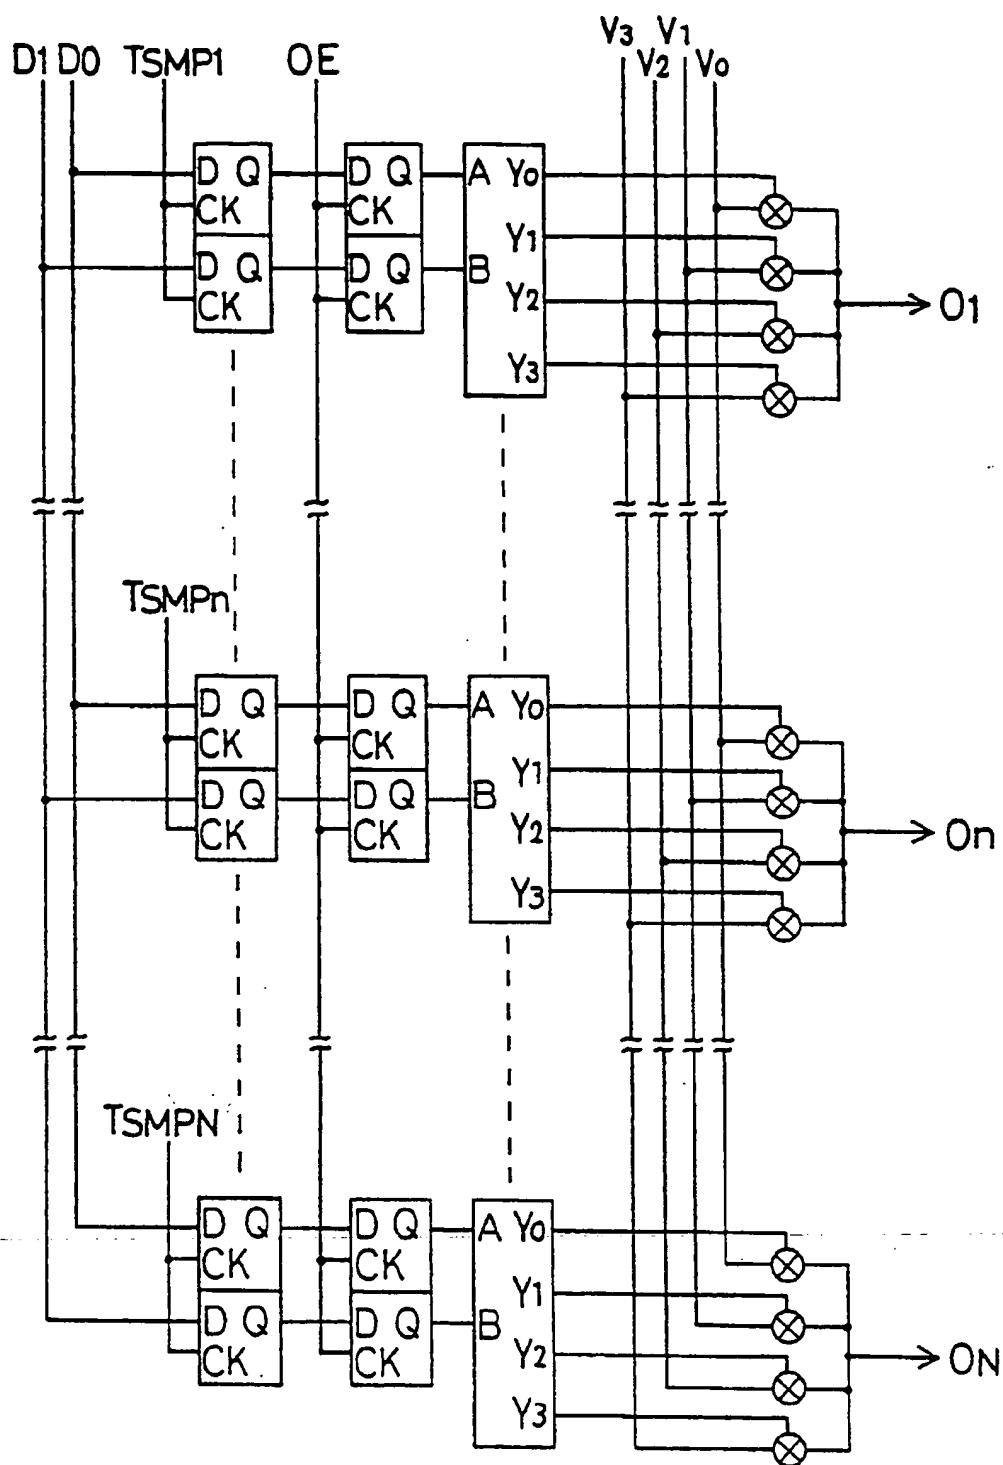


FIG. 14 PRIOR ART

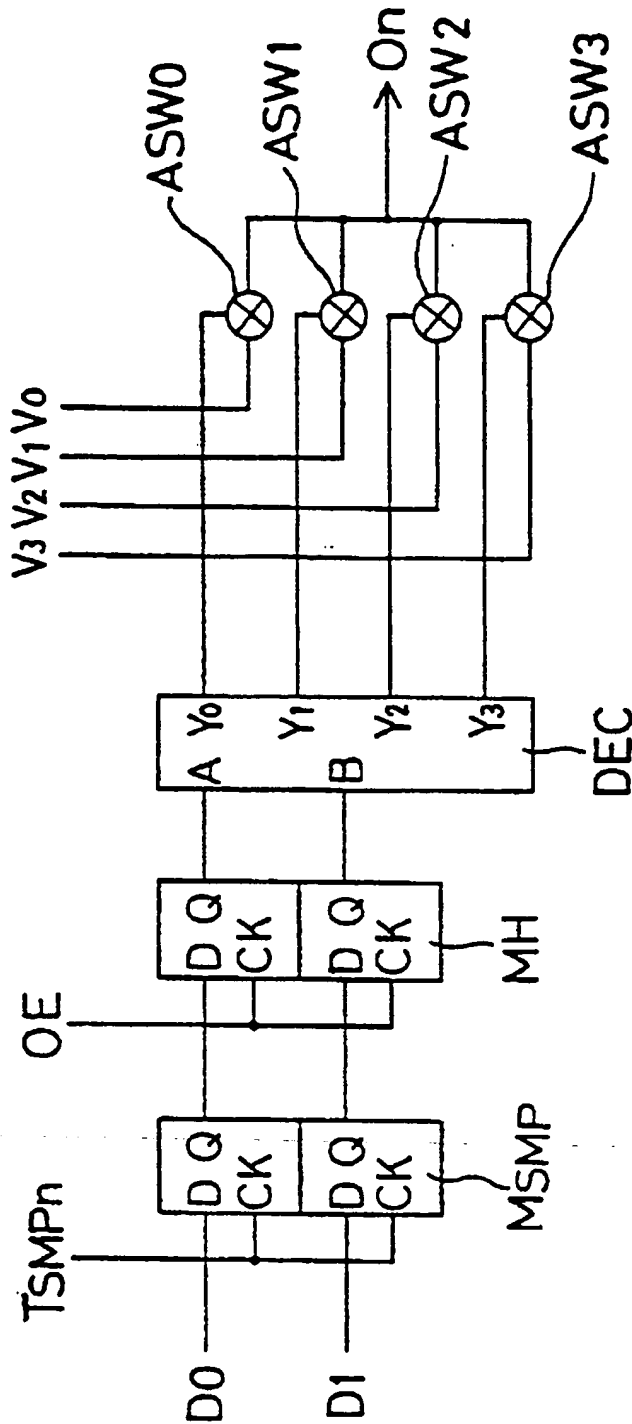


FIG. 15 PRIOR ART

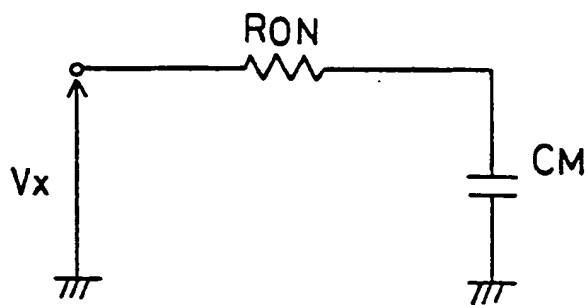


FIG. 16(a)

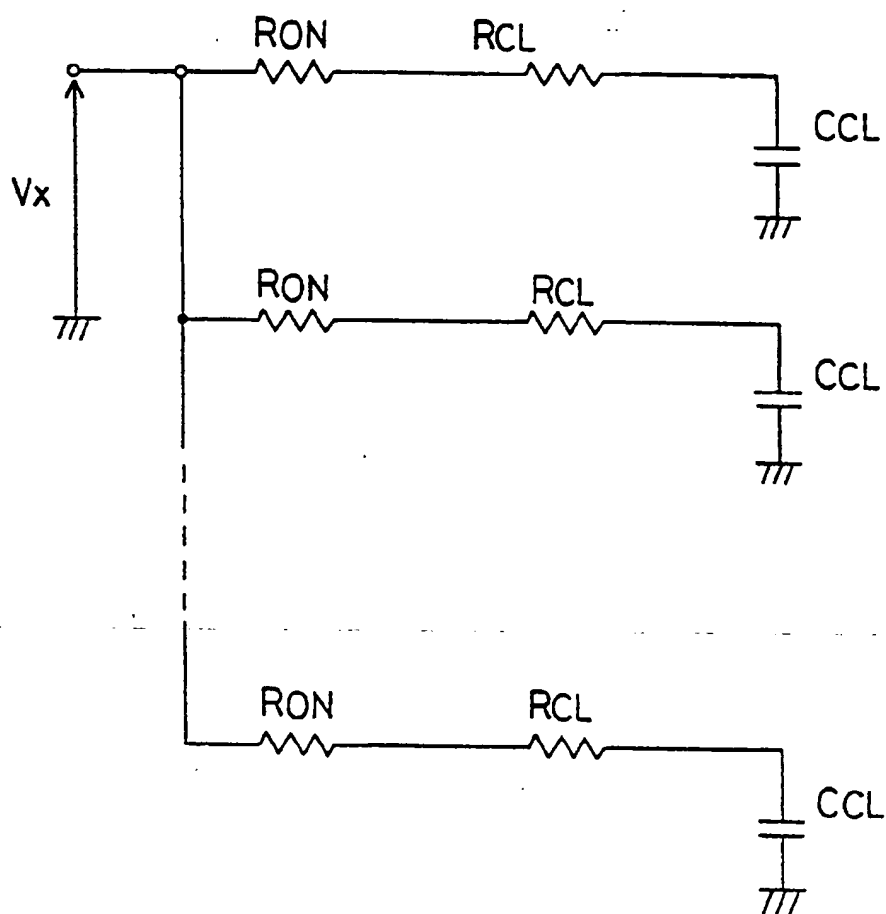


FIG. 16(b) PRIOR ART

DRIVE CIRCUIT FOR A DISPLAY APPARATUS

This is a continuation of application Ser. No. 07/767,340 filed on Sep. 27, 1991, now U.S. Pat. No. 5,440,323.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a drive circuit for a display apparatus, and more particularly to a drive circuit for a display apparatus which is capable of gray-scale display by means of amplitude modulation. In this specification, a matrix type liquid crystal display apparatus will be described as a typical example of a display apparatus, but this invention can also be applied to drive circuits for other types of display apparatus such as electroluminescent (EL) display apparatus and plasma display apparatus.

2. Description of the Prior Art

When driving a liquid crystal display (LCD) apparatus, since the speed of response of a liquid crystal is very slow as compared with a luminescent material used in a cathode ray tube (CRT) display apparatus, a special drive circuit is used. That is, in the drive circuit for the LCD apparatus, video signals which are sequentially sent are not immediately supplied to respective pixels, but the video signals are sampled for each of the respective pixels in one horizontal period and held for the horizontal period. The held video signals are output at the same time at the beginning of the next horizontal period, or at an appropriate point of time in the next horizontal period. After the output of video signal voltages to the respective pixels are begun, the signal voltages are held for a period of time sufficiently over the speed of response of the liquid crystal.

In order to hold the signal voltages, a prior art drive circuit utilizes capacitors. FIG. 11 shows a signal voltage output circuit (a source driver) for supplying drive voltages to N pixels on one scanning line selected by a scanning signal. A portion for the nth pixel of the signal voltage output circuit is shown in FIG. 12. The portion includes an analog switch SW₁, a sampling capacitor C_{SMP}, an analog switch SW₂, a holding capacitor C_H, and an output buffer amplifier A. The operation of the signal voltage output in the prior art will be described with reference to the circuit diagrams of FIGS. 11 and 12, and also to the signal timing chart of FIG. 13. Analog video signals v_i to be input to the analog switches SW₁ are sequentially sampled in accordance with sampling clock signals T_{SMP1}–T_{SMPN} which correspond to the respective N pixels on one scanning line selected by each horizontal synchronizing signal H_{sync}. By this sampling, the sequential instantaneous voltages V_{SMP1}–V_{SMPN} of the video signals v_i are applied to the corresponding sampling capacitors C_{SMP}. The nth sampling capacitor C_{SMP} is charged up to the value of the video signal voltage V_{SMPn} corresponding to the nth pixel, and holds this value. The signal voltages V_{SMP1}–V_{SMPN} which are sequentially sampled and held in one horizontal period are transferred from the sampling capacitors C_{SMP} to the holding capacitors C_H in response to an output pulse OE which is supplied to all of the analog switches SW₂ at the same time. Then the signal voltages V_{SMP1}–V_{SMPN} are output to source lines O₁–O_N connected to the respective pixels through the buffer amplifiers A.

To the drive circuit described above, analog video signals are supplied. Such a drive circuit presents the following problems (A1) to (A4) when attempts are made to increase the size or improve the resolution of a liquid crystal panel.

(A1) When the charges in the sampling capacitors C_{SMP} are transferred to the holding capacitors C_H, the relationship between the voltage V_H of the holding capacitor C_H and the sampled voltage Y_{SMP} is represented by the following expression:

$$V_H = \frac{1}{1 + \frac{C_H}{C_{SMP}}} \cdot V_{SMP}$$

Accordingly, in order that the voltage V_H held by the holding capacitor C_H may substantially equal the sampled voltage V_{SMP}, a condition of C_{SMP} >> C_H is required to be satisfied. That is, it is necessary to use the sampling capacitor C_{SMP} of a relatively large capacitance. However, if the capacitance of the sampling capacitor C_{SMP} is too large, it is necessary to make the time for charging (i.e. a sampling period) longer. On the contrary, as the size of the LCD apparatus is made larger or the resolution is improved, the number of pixels corresponding to one horizontal period increases, thereby necessitating a sampling period to be shortened in reverse proportion. It can be seen that there is a limit to the increase in size or the improvement in resolution of the LCD apparatus.

(A2) Analog video signals are supplied to the source driver via bus lines. As the size and resolution of a display apparatus are increased, the frequency band of the video signal becomes wider and the distribution capacity of the bus lines increases. This results in the necessity of a wide-band amplifier in the circuit supplying video signals, thereby increasing the cost of production.

(A3) In a color display apparatus in which RGB video signals are used, bus lines for supplying multiple analog video signals are arranged. As the size and resolution of a display panel of such an apparatus are increased, the above-mentioned wideband amplifier is required to have an extremely high signal quality so that there is no phase differences between the multiple video signals and no dispersion in the amplitude characteristics and frequency characteristics.

(A4) In the drive circuit for a matrix type display apparatus, unlike the display in a CRT, analog video signals are sampled in accordance with a clock signal and displayed in pixels arranged in a matrix. At this time, since delays of signals in the drive circuit including delays in the bus lines is unavoidable, it is extremely difficult to accurately establish the sampling position for the analog video signals. Particularly, when displaying a computer graphic image in which the relationship between video signals and pixel addresses should be precisely defined, shift in the image display position, bleeding of the image, etc., due to signal delays in the drive system and deterioration of the frequency characteristics cause significant problems.

These problems which occur when using analog video signals are solved by using digital data as video signals. When the video signals are supplied in the form of digital data, a drive circuit shown in FIG. 14 and 15 is used. For the sake of simplicity, the video signal data is composed of 2 bits (D₀, D₁). That is, video signal data have four values 0–3, and a signal voltage applied to each pixel is any one of four levels V₀–V₃. FIG. 14 is a circuit diagram showing a digital source driver circuit corresponding to the analog source driver circuit shown in FIG. 11. The circuit diagram of FIG. 14 shows the entire source driver for supplying driving voltages to N pixels. FIG. 15 shows a portion for the nth pixel in the circuit. The portion of the circuit comprises a D-type flip-flop (sampling flip-flop) M_{SMP} at a first stage and a flip-flop (holding flip-flop) M_H at a second stage which are

provided for the respective bits (D_0 , D_1) of the video signal data, a decoder DEC, and analog switches ASW_0 to ASW_3 , each of which is provided between corresponding one of four external voltage sources V_0 - V_3 and a source line O_n . For the sampling of digital video signal data, various circuits may be used other than the D-type flip-flop.

The digital source driver operates as follows. The video signal data (D_0 , D_1) are sampled at the rising of a sampling pulse T_{SMPn} corresponding to the n th pixel, by the sampling flip-flop M_{SMP} . At the time when the sampling for one horizontal period is completed, an output pulse OE is fed to the holding flip-flops M_H . All the video signal data (D_0 , D_1) held in the holding flip-flops M_H are simultaneously output to the respective decoders DEC. Each of the decoders DEC decodes the 2-bit video signal data (D_0 , D_1). In accordance with the values (0 to 3), one of the analog switches ASW_0 - ASW_3 is conductive, and the corresponding one of the four external voltages V_0 - V_3 is output to the source line O_n .

The source driver in which digital video signals are used for sampling can solve the problems (A1) to (A4) which arise when analog video signals are used for sampling. However, this source driver still has the following problems (D1) and (D2) to be solved.

(D1) With the increase in number of bits of digital video signal data, the size of each of memory cells, decoders, etc., constituting a drive circuit is drastically enlarged. Therefore, the size of a chip and the production cost are greatly increased.

(D2) When voltage sources supplied externally (V_0 - V_3 in FIGS. 14 and 15) are selected by using analog switches, the selected voltage source is directly connected to a source line of the liquid crystal panel and drives the source line. Accordingly, the circuit is required to have a performance capable of sufficiently driving the heavy load, i.e. the liquid crystal panel. This causes the production cost to increase.

SUMMARY OF THE INVENTION

The drive circuit of this invention, which overcomes the above-discussed and numerous other disadvantages and deficiencies of the prior art, comprises: voltage supplying means for supplying a plurality of signal voltages, the levels of said signal voltages being different; voltage selecting means, connected to said voltage supplying means, for receiving said digital video signal, for selecting one of said signal voltages in accordance with said digital video signal, and for supplying said selected signal voltage; signal voltage means, provided for each of said signal electrodes, for receiving said signal voltage from said voltage selecting means and for supplying said signal voltage to one of said signal electrodes via a corresponding switching element; and selection signal generating means for generating selection signals by which said switching elements are sequentially conductive, said selection signal generating means being connected to the control terminals of said switching elements of all said signal voltage means.

In preferred embodiments, said drive circuit comprises a predetermined number of said voltage selecting means, and each of said voltage selecting means is connected to said signal voltage means corresponding to signal electrodes at every said predetermined number, and said selection signal generating means generates selection signals by which said switching elements are conductive for a period which continues said predetermined number of times as long as the duration of said digital video signal.

Preferably, said signal holding capacitor is connected between said signal input switching element and said signal output switching element.

By a selection signal generated by the selection signal generating means, one or a plurality of signal voltage means are sequentially selected. The selected signal voltage means send out a signal voltage supplied from the voltage selecting means connected to the selected signal voltage means, to a signal electrode. Thus, at a certain point of time, the voltage supplying means connected to the voltage selecting means is not connected to all the signal electrodes, but only one or a plurality of selected signal electrodes.

The invention is accomplished in view of the above-mentioned present state. The objective of the invention is to provide a drive circuit for a display apparatus for digital video signal data in order to solve the disadvantages (A1) to (A4) in analog sampling, and moreover, to eliminate the problems (D1) and (D2).

BRIEF DESCRIPTION OF THE DRAWINGS

This invention may be better understood and its numerous objects and advantages will become apparent to those skilled in the art by reference to the accompanying drawings as follows:

FIG. 1 is a circuit diagram showing a signal voltage supplying circuit for an LCD apparatus in one embodiment of the invention.

FIG. 2 is a timing chart illustrating the operation of the signal voltage supplying circuit of the embodiment.

FIG. 3 is a block diagram showing the circuit of FIG. 1 in a simplified manner.

FIG. 4 is a circuit diagram showing a signal voltage supplying circuit with two D/A conversion circuits in a second embodiment of the invention.

FIG. 5 is a timing chart illustrating the operation of the signal voltage supplying circuit of the second embodiment.

FIG. 6 is a block diagram showing the circuit of the second embodiment in a simplified manner.

FIG. 7 is a circuit diagram showing a portion of a D/A conversion circuit for 4- digital video signal data in a third embodiment of the invention.

FIG. 8 is a block diagram showing the circuit of the third embodiment in a simplified manner.

FIG. 9 is a block diagram of a signal voltage supplying circuit with four D/A conversion circuits for 4-bit data in a fourth embodiment of the invention.

FIG. 10 is a timing chart illustrating the operation of the signal voltage supplying circuit in the fourth embodiment.

FIG. 11 is a circuit diagram showing a drive circuit for analog video signals.

FIG. 12 is a circuit diagram showing a portion for one source line in the circuit of FIG. 1.

FIG. 13 is a timing chart illustrating the operation of the drive circuit of FIG. 11.

FIG. 14 is a circuit diagram showing a drive circuit in which digital sampling circuits are provided for every source line.

FIG. 15 is a circuit diagram showing a portion for one source line in the circuit of FIG. 4.

FIG. 16 shows in (a) an equivalent circuit diagram when the signal voltage is supplied in the first embodiment of the invention and in (b) an equivalent circuit diagram when the signal voltage is supplied in the circuit of FIG. 14.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 shows a signal voltage output circuit (a source driver) for supplying signal voltages to N signal lines (source lines) in a drive circuit for a matrix type LCD apparatus in one embodiment of the invention. In this embodiment, for the sake of simplicity, 2-bit video signal data are used. The signal voltage output circuit of FIG. 1 comprises a digital-analog (D/A) conversion circuit DA for selecting one of plural external voltages in accordance with digital video signal data, and signal voltage hold circuits MO_i (i is 1 to N) provided for the respective N pixels on one scanning line. In the D/A conversion circuit DA, the 2-bit video signal data of D_0 and D_1 is sampled by a sampling flip-flop M_{SMP} and input into a decoder DEC. The sampling flip-flop M_{SMP} includes two D-type flip-flops corresponding to the respective bit of the input data. In accordance with the video signal data (D_0 , D_1) input into the decoder DEC through input terminals A and B thereof, the decoder DEC outputs an ON-control signal to one of analog switches ASW_0 – ASW_3 through corresponding one of four output terminals Y_0 – Y_3 . External voltage sources V_0 – V_3 are connected to terminals of the analog switches ASW_0 – ASW_3 , respectively. The other terminals of the analog switches are connected to a first analog switch $ASWM$ in the input portion of each of the signal voltage hold circuits MO_i (i is 1 to N).

The configuration of the signal voltage hold circuit MO_1 for the first source line be described. The other terminal of the first analog switch $ASWM$ is connected to one terminal of a second analog switch $ASWH$. A capacitor C_M is connected between the other terminal of the first analog switch $ASWM$ and the ground. The other terminal of the second analog switch $ASWH$ is connected to an input terminal of a buffer amplifier A. A capacitor C_H is connected between the other terminal of the second analog switch $ASWH$ and the ground. A selection pulse Tm_1 is fed into the control terminal of the first analog switch $ASWM$. An output pulse OE is fed into the control terminal of the second analog switch $ASWH$. Each of the signal voltage hold circuits MO_i corresponding to the other source lines has the same configuration as that of the signal voltage hold circuit MO_1 . The selection pulses Tm_i are sequentially supplied to the respective signal voltage hold circuits MO_i , and the output pulse OE is supplied in common to all the signal voltage hold circuits MO_i at the same time.

The operation of the signal voltage output circuit shown in FIG. 1 will be described with reference to the timing chart of FIG. 2. The 2-bit digital video signal data (D_0 , D_1) is fed in synchronization with the falling edge of a clock pulse CK. The sampling flip-flop M_{SMP} of the D/A conversion circuit DA shown in FIG. 1 latches digital video signal data $Data_1$, $Data_2$, $Data_3$, . . . corresponding to the respective pixels at the rising of the clock pulse CK, and outputs them to the decoder DEC as data DAM. The decoder DEC which receives the data $Data_i$ makes one of the outputs of the output terminals Y_0 – Y_3 effective, and the corresponding one of analog switches ASW_0 – ASW_3 is conductive. For example, if the contents of the data $Data_1$ is (D_0 , D_1)=(1, 1), the analog switch ASW_3 is conductive, and the external voltage V_3 is selected to be output as the output DA_{out} of the D/A conversion circuit DA.

The outputs DA_{out} of the D/A conversion circuit DA are supplied to all of the signal voltage hold circuits MO_i . However, at the time when the data $Data_1$ is sampled, only the analog switch $ASWM$ in the signal voltage hold circuit

MO_1 for the 1st source line O_1 is conductive in accordance with the selection pulse Tm_1 . As a result, the external voltage V_3 is applied only to the capacitor C_M in the signal voltage hold circuit MO_1 .

At the next rising of the clock pulse CK, the next digital data $Data_2$ is sampled, and the value thereof is decoded by the decoder DEC. An external voltage corresponding to the decoded data is supplied to all of the signal voltage hold circuits MO_i as the output DA_{out} of the D/A conversion circuit DA. At this time, only the analog switch $ASWM$ in the signal voltage hold circuit MO_2 for the 2nd source line O_2 is conductive in accordance with the selection pulse Tm_2 , so that the output DA_{out} is applied to the capacitor C_M in the signal voltage hold circuit MO_2 . That is, every time when the digital video signal data $Data_i$ is sampled, the external voltage V_i is applied only to the capacitor C_M in the i th signal voltage hold circuit MO_i in accordance with the selection pulse Tm_i .

After N digital video signal data $Data_1$ – $Data_N$ in one horizontal period are sampled and the capacitor C_M in the Nth signal voltage hold circuit MO_N is charged, the output pulse OE is fed to the second analog switches $ASWH$ in all of the signal voltage hold circuits MO_1 – MO_N . Therefore, the data held in the capacitors C_M are transferred to the capacitors C_H at the same time, and output to the respective source lines O_1 – O_N via the buffer amplifiers A. Thus, the pixels in the LCD apparatus are charged by the respective signal voltages.

As described above, in the signal voltage output circuit of the embodiment shown in FIG. 1, the external voltage source V_x is connected only to the capacitor C_M in one signal voltage hold circuit MO_i selected by the selection pulse Tm_i . The equivalent circuit at this time is shown in (a) of FIG. 16, and the loads of the external voltage V_x are the on-resistance R_{ON} of the selected one analog switch $ASWM$ and the capacitance of the capacitor C_M . However, the on-resistance R_{ON} of the analog switch $ASWM$ is small and the capacitance of the capacitor C_M can be made as small as about 7 pF, so that the load of the external voltage source is small. By contrast, for example, in the drive circuit shown in FIG. 14, the external voltage V_x directly drives the pixels of the liquid crystal panel. Therefore, as shown in (b) of FIG. 16, the resistance R_{CL} and the capacitance C_{CL} of the line to the pixel and the pixel itself also are connected to the on-resistance R_{ON} of the analog switch $ASWM$. Specifically, the values of the resistance R_{CL} and the capacitance C_{CL} have a large value such as approximately 50 K Ω and 200 pF, respectively. Moreover, in the circuit of FIG. 14, the selected external voltage source V_x is connected to a large number of pixels among the N pixels on one scanning line (the maximum number is N). As described above, since the loads of the external voltage sources V_0 – V_3 are very large in the drive circuit of FIG. 14, it is necessary to prepare voltage sources having a large capacity. By contrast, in the embodiment of FIG. 1, since the external voltage sources V_0 – V_3 are respectively used only for applying a voltage to one capacitor C_M , the power source device is a very simple one, irrespective of the number of source lines.

FIG. 3 is a block diagram showing in a simplified manner the signal voltage output circuit in the embodiment of FIG. 1. The signal voltage output circuit in this embodiment is provided with one D/A conversion circuit DA. The output DA_{out} is connected to all of the N signal voltage hold circuits MO_1 – MO_N . Actually, the signal voltage is sent out only to one signal voltage hold circuit MO_i selected by a selection pulse Tm_i .

A second embodiment of the invention is shown in FIG. 4. The second embodiment comprises a signal voltage

output circuit which is provided with two D/A conversion circuits DA1 and DA2. In the embodiment, one half of the N source lines O_1-O_N (i.e., $(N/2)$ source lines) is assigned to each of the D/A conversion circuits DA1 and DA2. The two D/A conversion circuits DA₁ and DA₂ receive digital video signal data, and output one of external voltages V_0-V_3 as outputs DA_{1out} and DA_{2out} in accordance with the values of the received data, respectively. The first D/A conversion circuit DA1 is connected to the signal voltage hold circuits MO_{2k-1} for odd source lines O_{2k-1} such as the 1st and 3rd source lines. The second D/A conversion circuit DA2 is connected to the signal voltage hold circuits MO_{2k} for even source lines O_{2k} such as the 2nd and 4th source lines. In this embodiment, the clock pulse CK is not used as it is, but a pulse CKH the frequency of which is divided in half as compared with the clock pulse CK is used as a sampling pulse in a sampling flip-flop M_{SMP} in the first D/A conversion circuit DA1. In a sampling flip-flop M_{SMP} in the second D/A conversion circuit DA2, the inverted pulse of the pulse CKH through an inverter INV is used as a sampling pulse.

The operation of the circuit is described with reference to the signal timing chart of FIG. 5. The digital video signal data (D₀, D₁) is sampled by the sampling flip-flop M_{SMP} of the first D/A conversion circuit DA1 at every rising of the clock pulse CKH, and sampled by the sampling flip-flop M_{SMP} of the second D/A conversion circuit DA2 at every falling of the clock pulse CKH. Thus, the first sampling flip-flop M_{SMP1} samples data of odd numbers such as the first data Data₁ and the third data Data₃. The second sampling flip-flop M_{SMP2} samples data of even numbers such as the second data Data₂ and the fourth data Data₄. The sampling flip-flops sample at every period of the clock pulse CKH, so that the data are held in the sampling flip-flops M_{SMP1} and M_{SMP2} for two periods of the clock pulse CK. The outputs DAM₁ and DAM₂ of the sampling flip-flops M_{SMP1} and M_{SMP2} are supplied to decoders DEC₁ and DEC₂, respectively. Each of the decoders DEC₁ and DEC₂ selects one of the external voltages V_0-V_3 in accordance with the same logic as in the decoder DEC shown in FIG. 1. The external voltages selected by the decoders DEC₁ and DEC₂ are output to the odd and even signal voltage hold circuits MO₁ as outputs DA_{1out} and DA_{2out}, respectively. In the signal voltage hold circuits MO₁-MO_N, these signals are blocked by the first analog switches ASWM, but in the signal voltage hold circuit MO_i which is sequentially selected by the pulse Tm_i, the signal voltage DA_{1out} or DA_{2out} is applied to the capacitor C_M. At this time, the duration of the selection pulse Tm_i is equal to two periods of the clock pulse, so that the signal voltage DA_{1out} or DA_{2out} is applied to the capacitor C_M for a time period twice as long as in the embodiment of FIG. 1. Thus, when all of the capacitors C_M of the N signal voltage hold circuits MO₁-MO_N hold the signal voltages, the output pulse OE is supplied to all of the signal voltage hold circuits MO₁-MO_N, so that the signal voltages are output to the source lines O₁-O_N to be applied to the pixels.

As described above, in the embodiment of FIG. 4, the signal voltage DA_{1out} or DA_{2out} generated by the selected external voltage can be applied to the capacitor C_M for the period of time twice as long as the duration of the digital video signal data (i.e., the period of the clock pulse). In other words, even if the duration of the digital video signal data is shortened, it is possible to take sufficient time for charging the capacitor C_M in the circuit of this embodiment.

In the circuits shown in FIGS. 1 and 4, the digital video signal is a 2-bit data. Next, the configuration of a D/A conversion circuit to which the digital video data of 4 bits is

supplied is shown in FIG. 7. In this case, according to the number of bits of the data, a sampling flip-flop M_{SMP} comprises four flip-flops, and the required levels of external voltage is $2^4=16$ (V_0-V_{15}). This may cause the decoder DEC to become large (4 inputs, and 16 outputs). However, after one of the external voltages V_x selected by analog switches ASW₀-ASW₁₅ is output as an output DA_{out}, the circuit operates in the same manner as in the circuit of FIG. 1. Furthermore, the block configuration of a signal voltage output circuit with two D/A conversion circuits DA1 and DA2 to which digital video signal data of 4 bits is supplied is shown in FIG. 8. The configuration is the same as that of the circuit shown in FIG. 6, except that the number of external voltage levels is 16 (V_0-V_{15}). Accordingly, the circuit is suitable as a drive circuit for a liquid crystal panel which has numerous pixels and numerous gray-scale levels. The block configuration of a signal voltage output circuit having four D/A conversion circuits DA1-DA4 is shown in FIG. 9, and the signal timing chart is shown in FIG. 10. In this case, pulses CK1-CK4 the frequency of each of which is divided into four with respect to the clock pulse CK are used. The pulses CK1-CK4 are shifted by one clock period. Each of the four D/A conversion circuits DA1-DA4 samples digital video signal data every four data. In other words, the first D/A conversion circuit DA1 samples the (4k-3)th data such as the 1st data Data₁ and the 5th data Data₅. The second D/A conversion circuit DA2 samples the (4k-2)th data such as the 2nd data Data₂ and the 6th data Data₆. The third D/A conversion circuit DA3 samples the (4k-1)th data such as the 3rd data Data₃ and the 7th data Data₇. The fourth D/A conversion circuit DA4 samples the 4kth data such as the 4th data Data₄ and the 8th data Data₈. The sampled data are held in the sampling flip-flops for the four periods of clock pulse. Since the duration of the selection pulse Tm_i equals to four periods of the clock pulse, the outputs DA_{1out}-DA_{4out} of the D/A conversion circuits DA1-DA4 are respectively applied to the capacitors C_M for a time period four times as long as the duration of the digital data. Therefore, the drive circuit is extremely advantageous, when the number of pixels is increased and the duration of the input signal is shortened.

According to the invention, digital video signal data are first converted into analog voltage signals, and then the signal voltages are sequentially output to respective capacitors for holding signal electrodes in accordance with selection pulses, in the same manner as in the prior art analog drive circuit. Therefore, since the external voltage source is connected only to the selected pixels, the loads for the external voltage source can be made very small. Accordingly, even when the number of pixels is increased with the increase in size and the improvement in resolution of the display apparatus, the capacity of the external voltage sources can still be extremely small. Furthermore, in the drive circuit of the invention, since a digital sampling circuit is not provided for each source line, the numbers of flip-flops, decoders and the like are still small, even if the number of pixels is increased. Moreover, even if the number of bits of the digital video signal data is increased, the number of flip-flops, decoders and the like which become larger in size is small. Therefore, if the size is increased and the resolution is improved in the display apparatus, the chip size can be prevented from being drastically enlarged.

Furthermore, by providing a plurality of circuits for converting digital video signal data into analog voltages, the external voltage can be supplied to the capacitor of each signal voltage hold circuit for a longer time period than the duration of the digital video signal data. Therefore, the drive circuit of the invention can be sufficiently used in a display

9

apparatus with high resolution in which the duration of the video signal is short.

It is understood that various other modifications will be apparent to and can be readily made by those skilled in the art without departing from the scope and spirit of this invention. Accordingly, it is not intended that the scope of the claims appended hereto be limited to the description as set forth herein, but rather that the claims be construed as encompassing all the features of patentable novelty that reside in the present invention, including all features that would be treated as equivalents thereof by those skilled in the art to which this invention pertains.

What is claimed is:

1. A drive circuit for a display apparatus into which a digital video signal is input and in which a plurality of parallel signal electrodes are provided, said circuit comprising:

voltage supplying means for supplying a plurality of signal voltages, the levels of said signal voltages being different;

voltage selecting means, connected to said voltage supplying means, for receiving said digital video signal, for selecting one of said signal voltages in accordance with said digital video signal, and for supplying as an output said selected signal voltage;

signal voltage means, provided for each of said signal electrodes, for receiving said selected signal voltage supplied as said output from said voltage selecting means via a corresponding input switching element and for supplying said selected signal voltage to one of said

10

signal electrodes via a corresponding output switching element; and

selection signal generating means for generating selection signals by which said input switching elements are sequentially conductive, said selection signal generating means being connected to a control terminal of said input switching element in each of said signal voltage means;

wherein said drive circuit comprises a predetermined number of said voltage selecting means, each voltage selecting means having a plurality of switches, said predetermined number being greater than one; and each of said voltage selecting means is connected to a respective one of said signal voltage means corresponding to said signal electrodes at every predetermined number of said voltage selecting means, and said selection signal generating means generates said selection signal by which said input switching elements are conductive for a period which is equal to a multiple number of times of a duration of said digital video signal, said multiple number being equal to said predetermined number, said selected signal voltage and a corresponding one of said selection signals being synchronized with each other.

2. The drive circuit of claim 1, wherein said signal voltage means are sequentially controlled through said control terminal of said input switching elements by said selection signals.

* * * * *